




COPPER C BEND

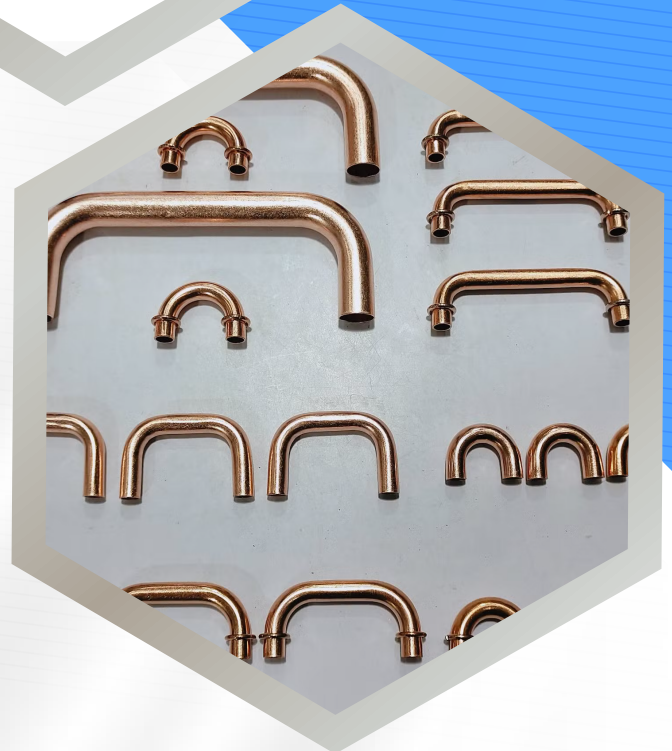

Copper C Bends are specialized fittings shaped like the letter 'C' to reroute pipelines while maintaining the same orientation. Made from deoxidized high-phosphorus copper (C12200), available in sizes from ¼" to 2". Conforming to ASTM B75 and EN 1057 standards, these bends offer excellent ductility and resistance to dezincification and internal corrosion. Typically used in tight plumbing layouts, hot/cold water lines, and cooling systems where traditional elbows or tees cannot fit.